

# Sistem Cor-70 Foaie Ascunsa cu BT

## Coefficient de transfer termic

Uw de la 1,0 (W/m<sup>2</sup>K)

Consultati tipologia, dimensiunea si sticla

## Izolare acustica

Maxim vitrare: 40 mm.

Izolare acustica maxima **Rw=46 dB**

## Categorii realizate pe bancul de probe

Permeabilitate la aer  
(EN 12207:2000): Clasa 4

Etanseitate la apa  
(EN 12208:2000): Clasa E1650

Resistencia al viento  
(EN 12210:2000): Clasa C5  
Test de referinta 1,1,23 x 1,48 m., 2 foaie.

## Finisaje

Posibilitate bicolor  
Culori vopsire (RAL, pestrit si texturat)  
Vopsire imitatie lemn  
Vopsire antibacteriana  
Anodizat






## Sectiuni

Toc 70 mm.  
Foaie 70 mm.

## Grosime profil

Fereastra 1,5 mm.

Lungime bara poliamida 35 mm.

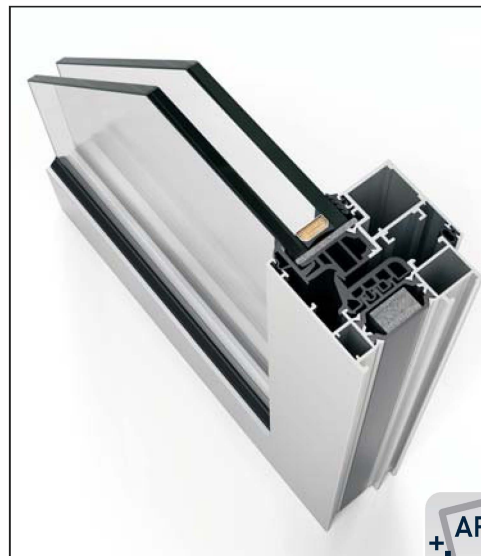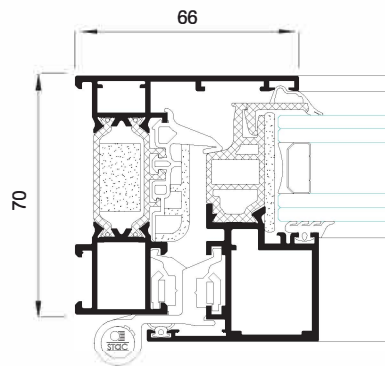

## Posibilitate de deschidere



## Deschidere interioara:

Batanta, oscilo-batanta, oscilo-paralela  
si oscilanta.

## Dimensiuni maxime/foaie

Latime (L)= 1.300 mm.  
Inaltime (H)= 2.400 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

## Greutate maxima

120 Kg.

