

Sistem Cor-70 Industrial cu BT

Coeficient de transfer termic

Uw de la 0,8 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 55 mm.

Izolarea acustica maxima **Rw=44 dB**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Categoriile realizate pe bancul de probe

Permeabilitate la aer
(EN 12207:2000): Clasa 4

Etanseitate la apa
(EN 12208:2000): Clasa E1200

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,23 x 1,48 m. 2 foi

Rezistenta la efracție
(EN 1627:2011): Grad RC2 (Wk2)

Incarcare de referinta 2,52 x 1,47 m. 1 foaie
cu feronerie EVO SECURITY



Sectiuni

Toc 70 mm.




Foaie 78 mm.

Lungime bara poliamida 32 - 35 mm.


Grosime profile

Fereastră 1,5 mm.

Usa balcon 1,7 mm.

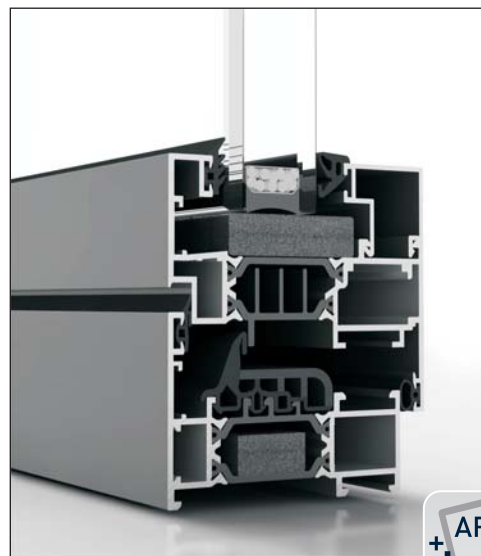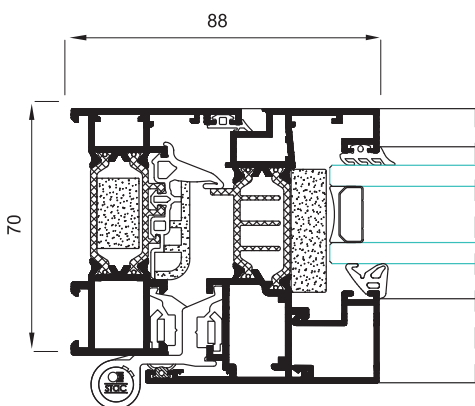

Posibilitate de deschidere

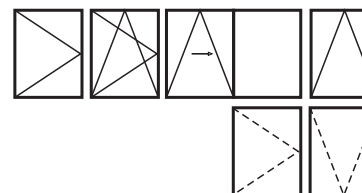

Deschidere interioara: batanta, oscilo-batanta, oscilo-paralela si oscilanta.

Deschidere exterioara: batanta, proiectanta.

Dimensiuni maxime/foaie

Latime(L) = 1.500 mm.

Inaltime (H) = 2.600 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

Greutate maxima/foaie

120 Kg.

