

Sistem Usa Millennium RF cu BT

Coeficient de transfer termic

Uw de la 1,4 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 48 mm.

Izolarea acustica maxima **Rw=38 dB**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Rezistenta la foc si controlul fumului

Test realizat dupa normativele
EN 1364-1:2000 si EN 1634-1:2010





CLASA EI₂60 - C5

Clasificare dupa normativa EN 13501-2:2009+A1:2010
(C5= 200.000 ciclu de proba)


Test de referinta usa 1,35 x 2,35 m. 1 foaie
Sticla EI60 monolita 23 la 25 mm.



Sectiuni Grosime profile
Toc 80 mm. Usa 2,2 mm.
Foaie 80 mm.
Lungime bara poliamida 35 mm.

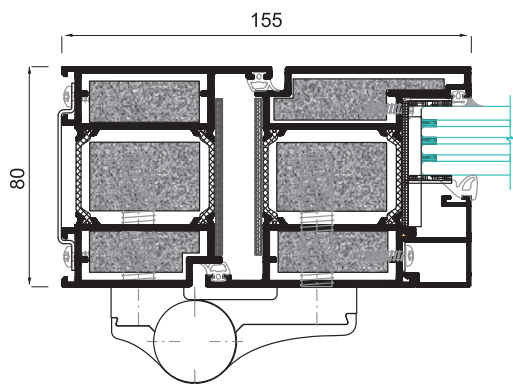

Posibilitate de deschidere



Deschidere interioara: batanta de
1 si 2 foi.

Deschidere exteriora: batanta de
1 si 2 foi.

Dimensiuni maxime/foaie

Latime(L) = 1.500 mm.
Inaltime (H) = 2.600 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

Greutate maxima/foaie

240 Kg.

