

Sistem Usa Millennium 2000

Coefficient de transfer termic

Uw de la 2,3 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 30 mm.

Izolarea acustica maxima **Rw=38 dBA**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Rezistenta la impactul cu un corp moale

Test realizat dupa normativa
EN 13049:2003

CLASA 5 (máx)

Test de referinta usa 1,80 x 2,20 m. 2 foi
Sticla laminata 3+3




Sectiuni

Toc 45 mm.


Foaiet 45 mm.

Grosime profile


Usa 2,0 mm.

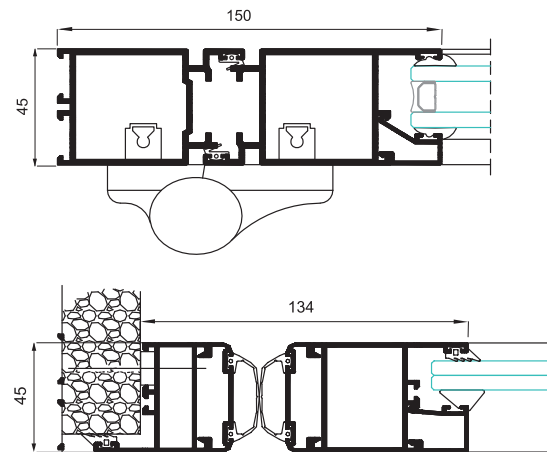

Versiunea automata



Posibilitati de deschidere



Deschidere interioara: de 1 si 2 foi

Deschidere exteriora: de 1 y 2 foi

Deschidere dute-vino: de 1 si 2 foi



Deschidere automata:

-glisanta de 1 si 2 foi

- batanta interior si exterior de 1 foaie

Dimensiuni maxime/foaie

Latime(L) = 1.450 mm.

Inaltime (H) = 3.000 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

Greutate maxima/foaie

180 Kg.

120 Kg. (versiune automata)

