

Sistem Cor-Vision Glisanta cu BT

Transmitanta

Uw de la 1,3 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 30 mm.

Izolarea acustica maxima **Rw=41 dBA**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizare

Categoriile realizate pe bancul de proba

Permeabilitate la aer
(EN 12207:2000): Clasa 4

Etanseitate la apa
(EN 12208:2000): Clasa 7A

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,23 x 1,55 m. 1 foaie + 1 fix



Sectiuni

Toc 116 mm.




182 mm. tricarril

Foaie 37 mm.


Lungime bara poliamida de 16 a 24 mm.

Grosime profile

Usa 1,7 mm.

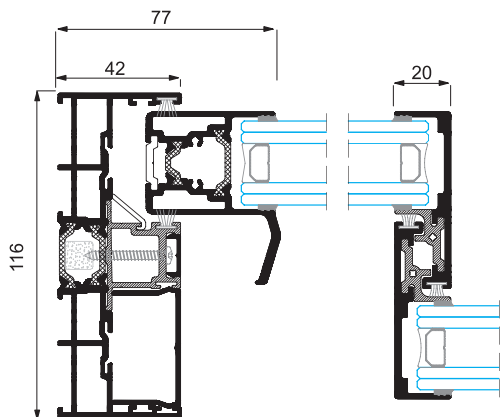

Posibilitati de deschidere

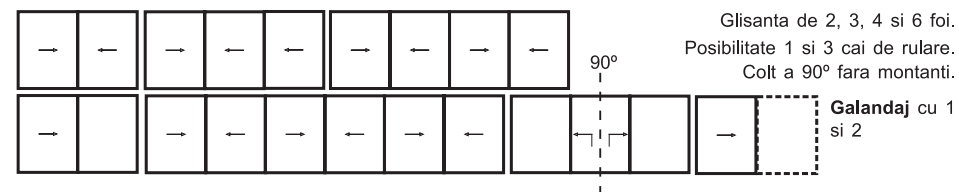

Dimensiuni maxime

Latime(L) = 4.400 mm.

Inaltime (H) = 3.000 mm.

Usa 2 foi

Consultati areutati si dimensiuni maxime pentru celelalte sisteme.

Greutate maxima/foaie

320 Kg.

