

Sistem 4700 Glisanta cu BT

Transmitanta

Uw de la 1,1 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 34 mm.

Izolarea acustica maxima **Rw=40 dBA**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizare

Categoriile realizate pe bancul de testare

Permeabilitate la aer
(EN 12207:2000): Clasa 3

Etanseitate la apa
(EN 12208:2000): Clasa 7A

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,80 x 2,20 m. 2 foi



Sectiuni


Tocuri 120 si 115 mm.

Foi 50 mm.


Lungime bara poliamida 20 si 25 mm.

Grosime profile

Usa balcon 1,5 mm.

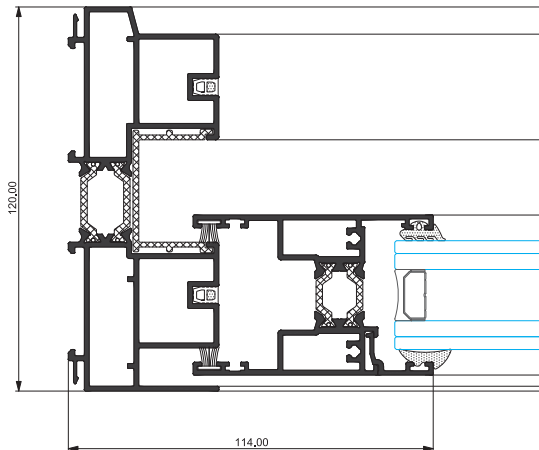

Posibilitati de deschidere



Glisanta de 2 si 3 foi.
Posibilitate de o singura
cale de rulare (foaie + fix)

Dimensiuni maxime/foaie

Latime (L) = 2.500 mm.
Inaltime (H) = 3.000 mm.

Greutate maxima/foaie

280 Kg.

Consultati greutatele si dimensiunile maxime pentru celelalte sisteme.

