

Sistem 2000 Glisanta Perimetrala

Coefficient de transfer termic

Uw de la 3,8 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 17 mm.

Izolarea acustica maxima **Rw=33 dBA**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Categoriile realizate pe bancul de proba

Permeabilitate la aer
(EN 12207:2000): Clasa 3

Etanseitate la apa
(EN 12208:2000): Clasa 8A

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,20 x 1,20 m. 2 foi



Sectiuni

Tocuri 40, 45 si 60 mm.

Foi 26 mm. (dreapta)



26 mm. (tesita)

27,5 mm. (rotunjita)


Grosime profile

Fereastră 1,5 mm.

106 si 126 mm. 3 cai de rulare

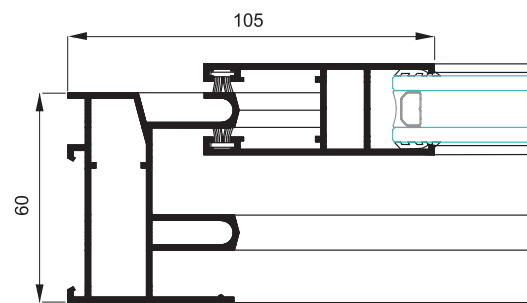

Posibilitati de deschidere

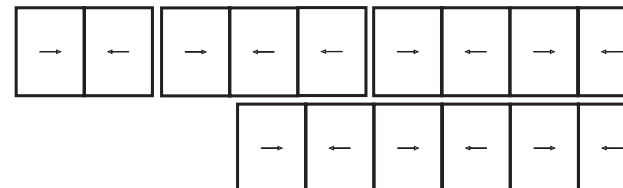

Glisanta de 2, 3, 4 si 6 foi.
Versiune cu 3 cai de rulare.
Versiune cu 1 cale de rulare.

Dimensiuni maxime

Latime(L) = 3.200 mm.
Inaltime (H) = 2.600 mm.
Fereastră 2 foi

Consultati areutati si dimensiuni maxime pentru celelalte sisteme.

Greutate maxima/foaie

100 Kg.



+40 (0) 744 69 08 49

contact@termopanebeclean.ro

www.termopanebeclean.ro